## PoE Ethernet Over UTP



Model	ALP-X015-EOU
Brand	Alstron
	ALSTEON* Forest Name (IT's blackering and and an analysis of the state
PoE Budget	15 Watts
Interface	
Interface	RJ45, BNC (75-Ohms RG59, RG6) (Full Duplex)
Standards	IEEE802.3 10BASE-T, IEEE802.3u 100BASE-TX, IEEE802.3af
Distance	17 W Up to 200m (Coax), 18W Up to 300m (UTP), 17 W Up to 500m (18 AWG)
System	
Indicators	Green: Link Good, Amber: Link Medium, Red: Link Bad, Off: No Link (Coax) Yellow : Power On, Green : Link/ACT (RJ45)
Button	Reset / Pairing
Power	
Power Input	DC 56V 1.17 A (Power Adaptor)
Power Consumption	≤ 1.5 Watts ≤ 16.5 Watts (with PoE)
Mechanical	
Dimension (L x W x H)	120 x 38 x 33 mm
Nett Weight	Approx. 0.7 kg
Environmental	
Standards	Design comply to CE
Storage Temperature	-20 ~ 60 °C
Operating Temperature	-20 ~ 50 °C
Operating Humidity	20 ~ 85% (non-condensing)


## **Related Products**



BNC to 8 Terminal converter ALP-EOU-CT8



BNC to RJ45 converter ALP-EOU-CE

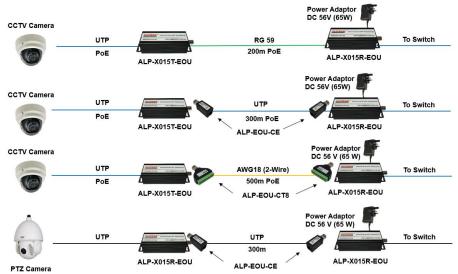

Surveillance, Communication and Power Solutioning Products Specialist

15

www.poe.com.sg

sales.sg@alstron.com.sg